

DATE OF ORDER:

DATE OF DELIVERY:

NAME OF THE ADDRESSEE/USER:

COMPANY WITH QUALITY MANAGEMENT SYSTEM CERTIFIED BY = ISO 9001 =

# **ORDER FORM**

**MODULAR SEATING SYSTEM** BUG with 856-851-850 **INDOOR** bases


Tested by BERLIN CERT GmbH and listed in the GERMAN HMV (Technical Aids Listing)

Certified by CERAH France

FDA registered (USA)

**€** Marked

# Please check off the interested products:

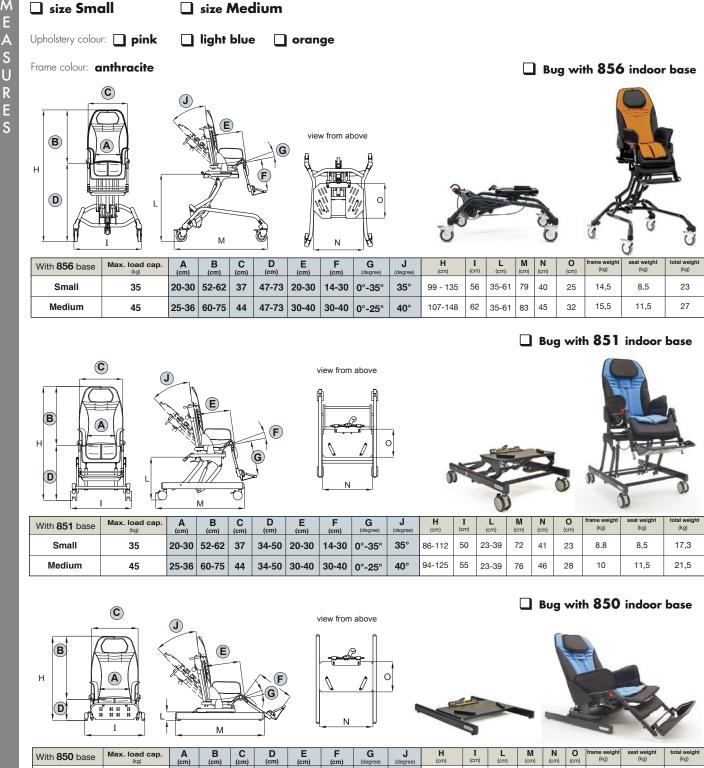

Μ Ε A S U

DISTRIBUTOR/AGENT:

Small

Medium

35

45

20-30

25-36

52-62

60-75

37

44

17

17

20-30

30-40

14-30

30-40

0°-35°

0°-25°

35°

**40**°

46

51

69-79 77-92 6

6

61 41 23

63

46 28 4.5

5.4

8,5

11,5

13

16.9



**ORDER FORM** 

BUG MODULAR SEATING SYSTEM technical specifications

> tention! ad carefully the user and

### SEAT UNIT, the only one with a tilt-in-space system incorporated in the seat

• HEADREST incorporated in the backrest: your child's head is always supported during the tilt adjustments of the seat and of the backrest, also without accessories.

- Rigid BACKREST, reclinable and adjustable in height. The hinge coincides with the child's pelvis physiological fulcrum.
- Tilt-in-space SEAT, adjustable in width and depth. Reversible (size Small, base 869).

• Fireproof, recyclable FABRIC. Colours durable and highly resistant to sweat, light, dry cleaning and washing. Maximum resistance to rubbing. Oeko-Tex Classe 1 Certificate - the highest reachable class for textile products intended for infants and children: for all fabrics that are in direct contact with the skin A guarantee of guality and eaferty for health

with the skin. A guarantee of quality and safety for health.

• Tip-up FOOTREST, flexion-extension adjustable, with legrest adjustable in height and tilt; the hinge coincides with the child's knee physiological fulcrum.

#### 869 OUTDOOR four wheels base - CRASH TESTED ISO 7176/19 and ANSI RESNA WC/19

foldable aluminium FRAME. Push-handle adjustable in tilt: adapts to the mother's height and reduces the encumbrance of the pushchair.
Puncture proof WHEELS, light and easy to push on every surface: front 17 cm with directional locks; rear 25 cm (size Small) or 30 cm (size Medium), with shock absorbers and independent drum brakes.

### 856 - 851 indoor high-low bases, 850 indoor compact floor base

Foldable FRAME in steel. Adjustable in height. It is easy and safe to use, thanks to a mechanism with a gas

spring, hand lever (base 851) and foot pedal (base 856)

- 10 cm swivelling WHEELS with brakes (for base 856)
- 7.5 cm swivelling WHEELS with brakes (for base 851)

